
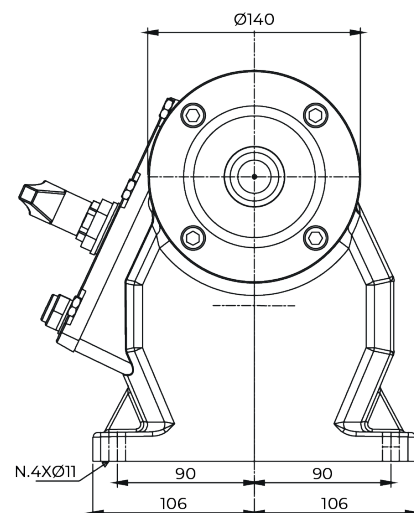
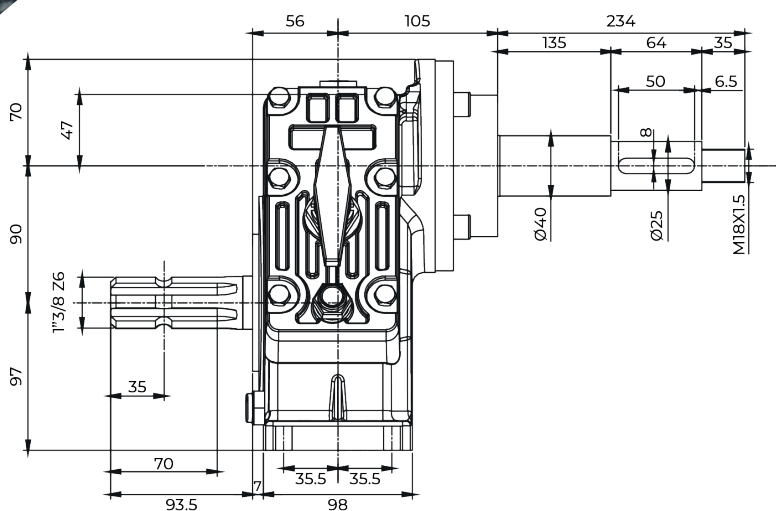


# F45 GEARBOXES



| OVERDRAW<br>GEARS | GEAR RATIO | INPUT REV<br>gri/min-rpm | INPUT POWER |      | OUTPUT REV<br>gri/min-rpm | CODE     | WEIGHT                 |
|-------------------|------------|--------------------------|-------------|------|---------------------------|----------|------------------------|
|                   |            |                          | HP          | kW   |                           | F45      | 20 Kg                  |
|                   | 1:5.25     | 540                      | 28          | 20.6 | 2835                      | BEARINGS | 6007 6207<br>6208 6305 |

| MATERIALS | SHAFTS    | GEARS     | BOX   | OIL   | TOOTHING                             |  |
|-----------|-----------|-----------|-------|-------|--------------------------------------|---------------------------------------------------------------------------------------|
|           | 16MnCr5+H | 21NiCrMo2 | GGG40 | SAE90 | C.T.R HELICOIDAL AND<br>SHAVED TOOTH |                                                                                       |

Gear ratio and output shaft length can be modified to fit customers' needs.